



CARTER CONTROL SYSTEMS

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001:2000

24V PALLET CONVEYOR

BENEFITS

- LOW POWER 24VDC CONSUMPTION
- SAFE AND QUIET OPERATION
- LOWER COST TO OWNERSHIP
- REDUCE INSTALLATION TIME AND COMPLEXITY
- REQUIRES NO SIGNIFICANT PREVENTATIVE MAINTENANCE
- RUN-ON-DEMAND MODE PROVIDES COST SAVINGS AND EXTENDED SERVICE LIFE
- REMOVEABLE SAFETY GUARD

THE CARTERROLL™ PALLET HANDLING CONVEYORS ARE SAFE, DURABLE, RELIABLE, AND SIZED IN VARIOUS STANDARD WIDTHS AND LENGTHS FOR FLOOR MOUNTING.

THE CARTERROLL™ 24VDC PALLET CONVEYOR CONSISTS OF 2.5" DIAMETER MOTORIZED POWER ROLLERS (MPR) AND IDLER ROLLERS CONFIGURED INTO ZONES INTERCONNECTED BY CHAIN. MOTORIZED POWER ROLLERS ARE PLACED AS NEEDED ALONG THE CONVEYOR EQUIPMENT TO ENSURE THE CONSISTENT MOVEMENT, CONTROL AND ORIENTATION OF THE PRODUCT. THE NUMBER OF MOTORIZED ROLLERS AND ASSOCIATED SLAVE-DRIVEN IDLER ROLLERS THAT MAKE UP A ZONE IS DEPENDENT ON THE VARIATION OF PRODUCT SIZE AND CONVEYOR LENGTH. THE ZONE DESIGN ALSO PROVIDES ZERO PRESSURE, ZERO CONTACT ACCUMULATION KEEPING PRODUCT FROM CONTACTING EACH OTHER ALONG THE CONVEYOR PATH.


THE PRODUCT IN ONE ZONE WILL ONLY MOVE ALONG INTO THE NEXT ZONE IF THE NEXT ZONE IS UNOCCUPIED. CONVEYOR ZONES STOP RUNNING IF THERE IS NO PALLET TO TRANSPORT IN THAT ZONE. THIS RUN-ON-DEMAND FEATURES REDUCES OPERATIONAL COST AND EXTENDS EQUIPMENT LIFE.

BOTH MECHANICAL AND ELECTRICAL COMPONENTS FOR THE CARTERROLL™ CONVEYOR ARE MODULAR AND INTERCHAN-



GEABLE. ALL ELECTRICAL COMPONENTS MEET APPLICABLE STANDARDS FOR RATING, CLASS, AND APPROVALS FOR NEMA, UL, AND CE. ALL PRE-ENGINEERED CARTERROLL™ CONVEYOR EQUIPMENT REQUIRES A 24VDC SYSTEM SUPPLIED POWER SOURCE. ALL CONVEYOR WIRING IS CAPTURED WITHIN THE CONVEYOR FRAMING AND UTILIZES A COMBINATION OF TERMINAL BLOCKS, QUICK DISCONNECT CONNECTORS AND WIRE/CABLE HARNESSSES. WHERE WIRING MUST CROSS THROUGH THE CONVEYOR TO THE OTHER SIDE, THRU-PIPES MAY BE UTILIZED.

**IT'S ALL ABOUT SAFETY, DURABILITY, RELIABILITY, AND SAVING ENERGY,
SO MAKE YOUR MOVE TO CARTERROLL™ CONVEYORS NOW.**



24V PALLET CONVEYOR


FEATURES

- 2,500 LBS PALLET CAPACITY
- 24VDC OPERATING VOLTAGE
- MODULAR COMPONENT DESIGN
- AUTO ACTIVATED ZERO PRESSURE, ZERO CONTACT ZONES
- REDUCED ENERGY CONSUMPTION
- STANDARD BETWEEN FRAME 36"-56" IN 2" INCREMENTS
- STANDARD ROLLER CENTERS 3.25", 4"-6" IN 1" INCREMENTS
- PLUG AND CONVEY MODULES PRETESTED AND ENGINEERED TO REDUCE MAINTENANCE
- ACCUMULATION AND TRAIN RELEASE MODES

TECHNICAL DATA

CONTROLS/POWER REQUIREMENTS: <ul style="list-style-type: none"> - 24VDC - DEVICE NET™ COMPATIBLE - POWER AND CONTROL SYSTEM CABLING ENCLOSED INSIDE CHANNELS 	CAPACITY: <ul style="list-style-type: none"> - 2,500 LBS PER ZONE - 2.5 DIAMETER X 11 GAUGE ROLLERS 	FRAME: <ul style="list-style-type: none"> - 7 GA STEEL WITH 2.75" FLANGES, CROSSMEMBER SUPPORTS, AND PROTECTIVE COVERS [CARTERROLL™ DESIGN] - OPTIONAL 4 GA STEEL WITH 2.75" FLANGES, CROSSMEMBER SUPPORTS, AND PROTECTIVE COVERS [CARTERROLL™ DESIGN]
SPEED: <ul style="list-style-type: none"> - 10 FPM- 60 FPM 	SUPPORT MECHANISM: <ul style="list-style-type: none"> - FLOOR: ADJUSTABLE LEG SUPPORT 	CONVEYOR DRIVE: <ul style="list-style-type: none"> - 24VDC POWERED ROLLER
DIMENSIONS: <ul style="list-style-type: none"> - 36"- 56" BETWEEN FRAME - 30"- 50" CONVEYOR SURFACE 	MOUNTING CAPABILITIES: <ul style="list-style-type: none"> - FLOOR 	PRODUCT DETECTION: <ul style="list-style-type: none"> - PHOTO ELECTRIC SENSOR/ PROXIMITY INDUCTIVE CONFIGURATON

STANDARD ZONE CONTENTS

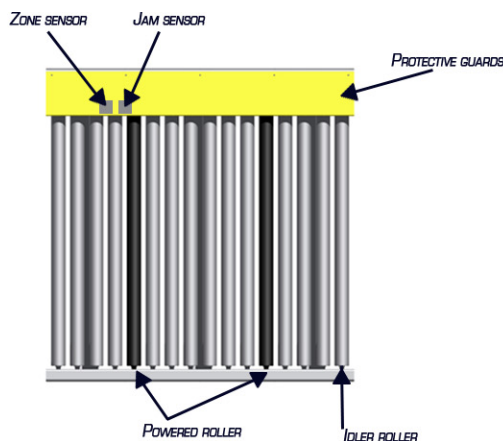

ZONE CONFIGURATION

